


298.00 EUR

incl. 19% VAT, plus [shipping](#)

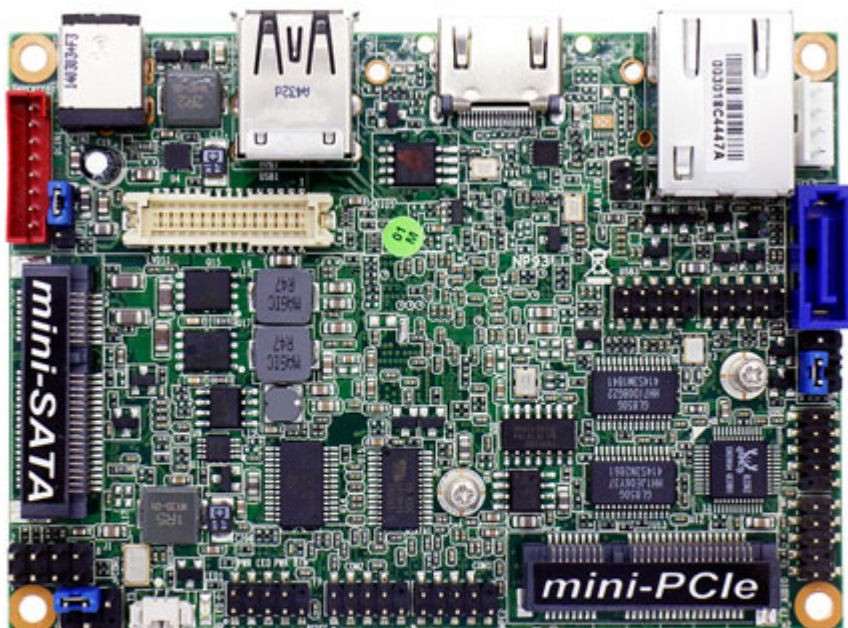

- Intel® Bay Trail N2930 (QC, 1.83G)
- DDR3 on board 2GB
- Support 1 \* Serial ATAI (3Gb/s) Device
- Integrated Realtek ALC662 HD Audio CODEC with 4-CH
- 1 \* 24 bits Dual Channel LVDS header
- Support HDMI Output
- Supports 1 \* Realtek RT8111G Gigabit LAN
- 100 x 72 mm Pico Form Factor

| Form Factor       |                                       |
|-------------------|---------------------------------------|
| Dimensions        | Pico (100 X 72 mm)                    |
| Processor System  |                                       |
| CPU               | Intel® Celeron® Processor N2930/N2807 |
| Core Number       | by CPU                                |
| Max Speed         | by CPU                                |
| L2 Cache          | by CPU                                |
| Chipset           | SoC                                   |
| BIOS              | UEFI                                  |
| Expansion Slot    |                                       |
| PCI               | 0                                     |
| Mini-PCle         | 1 (half size)                         |
| mSATA             | 1                                     |
| PCIe              | 0                                     |
| CFast Card Socket | 0                                     |
| CF Card Socket    | 0                                     |
| Memory            |                                       |
| Technology        | 1 * DDR3 1333MHz Single CH on board   |
| Max.              | 2GB                                   |

|                           |                                                                                                      |
|---------------------------|------------------------------------------------------------------------------------------------------|
| Socket                    | - 0                                                                                                  |
| <b>Graphics</b>           |                                                                                                      |
| Controller                | - Intel® HD Graphics up to 854 MHz                                                                   |
| VRAM                      | - Shared Memory                                                                                      |
| VGA                       | - No                                                                                                 |
| LVDS                      | - 1 * Onboard 24-bits dual channel connector                                                         |
| HDMI                      | - 1                                                                                                  |
| DVI-I                     | - No                                                                                                 |
| DisplayPort               | - No                                                                                                 |
| MultiDisplay              | - Yes (Dual Display)                                                                                 |
| <b>Ethernet</b>           |                                                                                                      |
| Ethernet                  | - 10/100/1000 Mbps                                                                                   |
| Controller                | - GbE LAN: RTL8111G                                                                                  |
| Connector                 | - 1 x RJ 45                                                                                          |
| <b>SATA</b>               |                                                                                                      |
| Max Data Transfer Rate    | - 1 * SATAII (3.0Gb/s)                                                                               |
| <b>Rear I/O</b>           |                                                                                                      |
| VGA                       | - 0                                                                                                  |
| DVI-I                     | - 0                                                                                                  |
| HDMI                      | - 1                                                                                                  |
| DisplayPort               | - 0                                                                                                  |
| Ethernet                  | - 1                                                                                                  |
| USB                       | - 2 (1 x USB 2.0 + 1 x USB 3.0)                                                                      |
| Audio                     | - 0                                                                                                  |
| Serial                    | - 0                                                                                                  |
| eSATA                     | - 0                                                                                                  |
| PS2                       | - 0                                                                                                  |
| DC-input                  | - DC in Jack 12V                                                                                     |
| <b>Internal Connector</b> |                                                                                                      |
| USB                       | - 6 ( 6 x USB 2.0 via 10pin header )                                                                 |
| PS2                       | - 0                                                                                                  |
| LVDS / inverter           | - 1                                                                                                  |
| VGA                       | - 0                                                                                                  |
| Serial                    | - 1 (1x RS-232 with 5V/12V selectable header)                                                        |
| SATA                      | - 1 * SATAII (3.0Gb/s)                                                                               |
| mPCIe                     | - 1 (half size)                                                                                      |
| Parallel                  | - 0                                                                                                  |
| mSATA                     | - 1                                                                                                  |
| CIR                       | - 0                                                                                                  |
| GPIO 8-bit                | - 0                                                                                                  |
| Chassis intrusion         | - 0                                                                                                  |
| Audio Header              | - 1                                                                                                  |
| <b>Watchdog Timer</b>     |                                                                                                      |
| Output                    | - From Super I/O to drag RESETCON#                                                                   |
| Interval                  | - 256 segments, 0,1,2...255sec/min                                                                   |
| <b>Power Requirements</b> |                                                                                                      |
| Input PWR                 | - 12V DC-In Jack                                                                                     |
|                           | AT/ATX Supported                                                                                     |
| Power On                  | - AT : Directly PWR on as Power input ready<br>- ATX: Press Button to PWR on after Power input ready |
| <b>Certifications</b>     |                                                                                                      |
| Certifications            | - CE, FCC, RoHS, REACH                                                                               |
| <b>Environment</b>        |                                                                                                      |

---

|             |                      |
|-------------|----------------------|
| Temperature | - Operating: 0■– 60■ |
|             | - Storage: -20■– 85■ |