


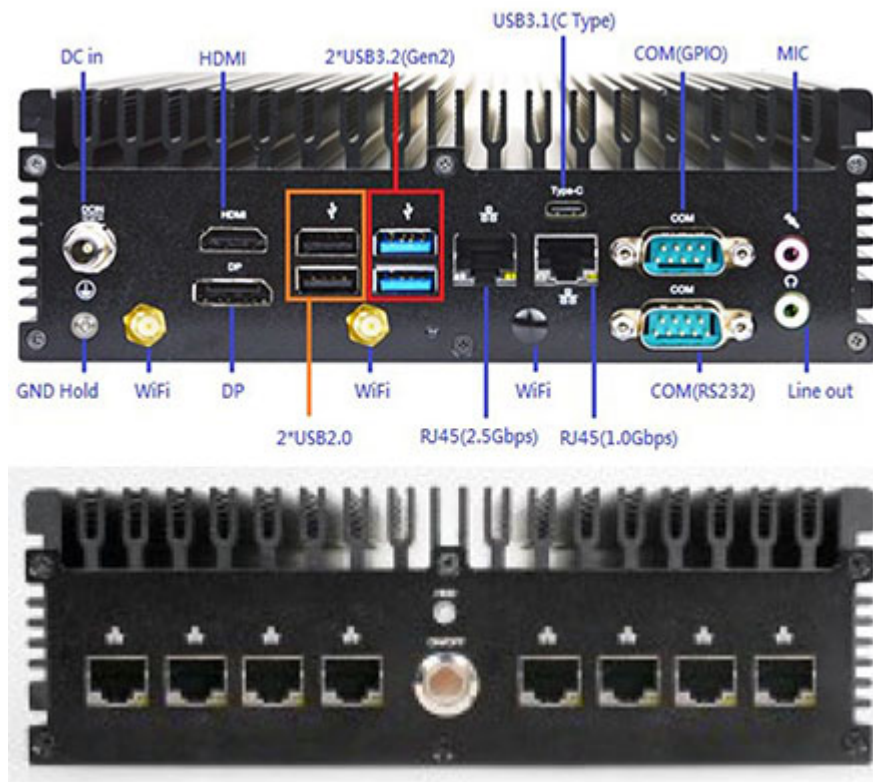

1389.00 EUR

incl. 19% VAT, plus [shipping](#)

- Intel Tiger Lake !
- HBJC38AZ02 Series !

|                |                                                                                                                                                                                                                                                        |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Part No.       | – HBJC38AZ02 SERIES                                                                                                                                                                                                                                    |
| BIOS           | – AMI Flash ROM                                                                                                                                                                                                                                        |
| CPU/Chipset    | – Intel® Taigerlake-UP3 Soc Processor (i5-1145G7/default)                                                                                                                                                                                              |
| Memory         | 2* DDR4 3200MHz SO-DIMM up to 64GB                                                                                                                                                                                                                     |
| Graphics       | Intel HD Graphics, shared memory<br>2 * DP (Max Resolution: 4096x2304@60Hz)<br>1 * HDMI 2.0 (Max Resolution: 4096x2160@60Hz)                                                                                                                           |
| Network        | – 1 * Intel i219LM GbE<br>– 1 * Intel i225V GbE                                                                                                                                                                                                        |
| Storage        | – 1 * M.2 M-key 2242/2280 (SATA/PCIe Gen4 x4 Interface support NVMe)<br>– 1 * 2.5" SATA HDD (6Gb/s)                                                                                                                                                    |
| Expansion      | – 1 * M.2-2230 E-Key (USB2.0/PCIex1 for WiFi support CVNi)<br>– 1 * M.2-3042/3052 B-Key (USB3.1/USB2.0/PCIe x1 for 4G&5G expansion)<br>- 1 * SIM Card Adapter (Internal)                                                                               |
| Rear Panel I/O | – 2 * USB 2.0<br>– 2 * USB 3.2 (Gen.2)<br>– 1 * DP, 1 * HDMI<br>– 2 * RJ45 (2.5Gbps/1.0 Gbps)<br>– 1 * Line out, 1 * MIC combo<br>– 2 * COM (TOP: co-lay GPÜIO, Bottom: Support RS 232)<br>– 1 * DC Jack (Lock Type)<br>– 3 * Antenna holes (Optional) |

|                 |                                                                                                                                                                                                                                                                                           |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Front Panel I/O | <ul style="list-style-type: none"> <li>– 1 * Power Button + LED</li> <li>– 1 * HDD LED</li> <li>– COM (By Model)</li> <li>– Intel LAN (By Model)</li> <li>– GPIO (8-bits IN &amp; 8-bits OUT / by Model)</li> <li>– USB3.0 (by Model)</li> </ul>                                          |
| Power Source    | <ul style="list-style-type: none"> <li>– Adapter / AC 100~240V input / DC19V-90W</li> <li>– MB : DC 12~24V input</li> </ul>                                                                                                                                                               |
| Compliance      | <ul style="list-style-type: none"> <li>– CE, FCC, LVD, RoHS,</li> </ul>                                                                                                                                                                                                                   |
| Temperature     | <ul style="list-style-type: none"> <li>– Operating Temperature: -20 ~ 50° C (Under the condition of using M.2 interface SSD)<br/>(The test environment is closed and windless)</li> <li>– Storage Temperature: -20 ~ 70° C</li> <li>– Humidity : 40% ~ 60% RH (non-condensing)</li> </ul> |
| Dimensions      | <ul style="list-style-type: none"> <li>– 185 (W) x 175 (D) x 60 (H) mm</li> </ul>                                                                                                                                                                                                         |
| OS Support      | <ul style="list-style-type: none"> <li>– Windows 11, Linux</li> </ul>                                                                                                                                                                                                                     |